




ELECTRO GALVANIZED STEEL TAPE

ITEM	UNIT	VALUE
zinc coating rate	g/m ²	30~110
Tensile strength	Mpa	270~390
Elongation	%	>28
ID	mm	190
OD	mm	580
Thickness	mm	0.20, 0.30, 0.48, 0.58, 0.60, 0.66, 0.8
Width	mm	15, 20, 25, 32, 40, 48, 50, 60

- * Other parameters including width, length, ID and OD can be arranged based on customers' requirements.
- * Cold rolled steel strip (without zinc coating) for armoring can also be provided.
- * Reference: Standards based on YB/T 024 -92, ASTM and BSEN.

HOT DIPPED GALVANIZED STEEL STRIP

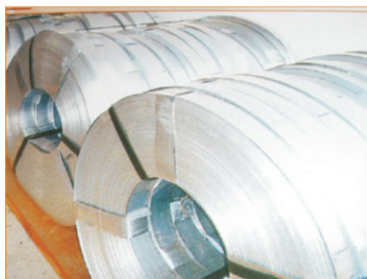

ITEMS	UNIT	VALUE
Zinc coating rate	g/m ²	80-275
Tensile strength	Mpa	315-430
Elongation	%	>33
ID	mm	500-510
OD	mm	1000-1600
Thickness	mm	0.20-3.0, ±0.02
Width	mm	32-550, ±0.15

- * Other parameters including width, length, ID and OD can be arranged based on customers' requirements.
- * Oscillate wound (Traverse Wound) packing can be provided.

GALVANIZED STEEL WIRE

Reference: ASTM B498 Class A

Diameter	Dia. Tolerance	Tensile Strength	1% Elongation Tensile Strength	Elongation (250mm)	Wrapping Test	Zinc-Coating
1.60-1.99mm	+0.03/-0.03	≥1450Mpa	≥1310Mpa	≥2%	2D/3D	≥180g/m ²
2.00-2.30mm	+0.04/-0.03	≥1450Mpa	≥1310Mpa	≥3%	2D/3D	≥220g/m ²
2.31-3.05mm	+0.05/-0.05	≥1410Mpa	≥1280Mpa	≥3.5%	2D/4D	≥250g/m ²
3.06-3.60mm	+0.08/-0.05	≥1410Mpa	≥1240Mpa	≥4%	2D/5D	≥275g/m ²
3.61-4.80mm	+0.10/-0.08	≥1380Mpa	≥1170Mpa	≥4%	2D/5D	≥300g/m ²